



# Dynalite 多用途控制器

## DMC2-UL

Multichannel control via two interchangeable modules. The device is available with a variety of control modules to handle various load types and capacities.

Multichannel control via two interchangeable modules. The device is available with a variety of control modules to handle various load types and capacities.


### 产品数据

基本信息	
CE 标志	CE 标识
备注	Please download the Lighting - Product Data Sheet for more information and ordering options
符合欧盟 RoHS 规范	是
运营和电气	
输入频率	50 至 60 Hz
输入电流 (标称)	32A per phase or single phase 63A max A
应用	
加拿大和美国 UL 认证	Yes
适用条件	
环境温度范围	0 ~ +40°C

产品参数	
完整产品代码	871869600701300
订单产品名称	DMC2-UL
EAN/UPC - 产品	8718696007013
订购代码	913703666009
SAP 计算器 - 每个包中的数量	1
计算器 - 每个外包装箱中的包数	1
SAP 材料	913703666009
SAP 净重 (每件)	7.710 kg

## Dynalite 多用途控制器

### 二维绘图

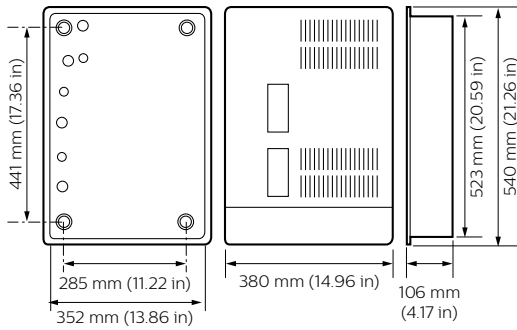

Dynalite Multipurpose Controllers

