



TL5 Essential HE Super 80

TL5 Essential 14W/840 1SL/40

Philips TL5 Essential Super80 is a new fluorescent lamp which provides home users and professional end-users an aesthetic miniaturized lighting solution with high reliability at low price.

安全提示

· 20,000 hours lifetime (50% survival point, 3 hour cycle) with preheat ballast which is ENEC compliant. Lifetime performance may differ on non-ENEC compliant ballasts.

产品数据

基本信息	
底盖	G5 [G5]
50% 故障预热条件下的使用寿命 (标称)	20000 h
LSF 预热 2000 小时额定	98 %
LSF 预热 4000 小时额定	97 %
LSF 预热 6000 小时额定	95 %
LSF 预热 8000 小时额定	93 %
LSF 预热 16000 小时额定	70 %
LSF 预热 20000 小时额定	50 %
照明科技	
颜色代码	840 [CCT 4000K]
光通量 (标称)	1350 lm
光通量 (额定)(标称)	1260 lm
颜色名称	冷白色 (CW)
光效 (最大光通下, 额定)(标称)	96 lm/W
相关色温 (标称)	4000 K
光效 (额定)(标称)	88 lm/W


显色指数 (最大)	85
显色指数 (最小)	80
显色指数 (标称)	82
LLMF 2000 小时额定	94 %
LLMF 4000 小时额定	92 %
LLMF 6000 小时额定	91 %
LLMF 8000 小时额定	90 %
LLMF 12000 小时额定	88 %
LLMF 16000 小时额定	87 %
LLMF 20000 小时额定	86 %
运营和电气	
Power (Rated) (Nom)	14.3 W
灯具电流 (标称)	0.170 A
温度	
设计温度 (标称)	30 °C

TL5 Essential HE Super 80

控制调光	
可调光	否
机械和壳体	
灯泡外形	T5 [16 mm (T5)]
应用	
汞 (Hg) 含量 (标称)	2.0 mg
能耗 kWh/1000 h	15 kWh
产品参数	
完整产品代码	692341077176300

订单产品名称	TL5 Essential 14W/840 1SL/40
EAN/UPC - 产品	6923410771763
订购代码	927925984060
SAP 计算器 - 每个包中的数量	1
计算器 - 每个外包装箱中的包数	40
SAP 材料	927925984060
复制净重 (每件)	0.050 kg


二维绘图

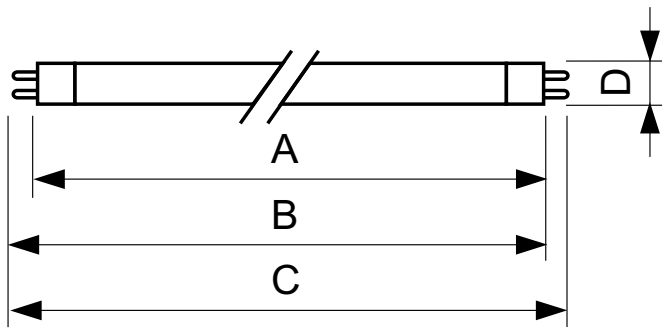

TL5 Essential 14W/840 1SL/40

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL5 Essential 14W/840 1SL/40	17.0 mm	549.0 mm	556.1 mm	553.7 mm	563.2 mm

光度数据

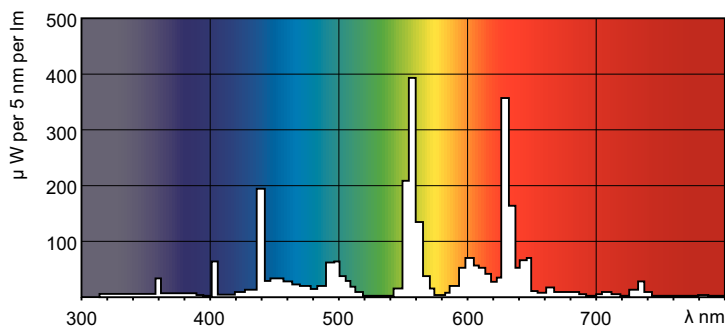

LDPO_TL5ESS8_ESS_840-Spectral power distribution Colour

TL5 Essential HE Super 80

